

YAKIMA


BaseClip 120

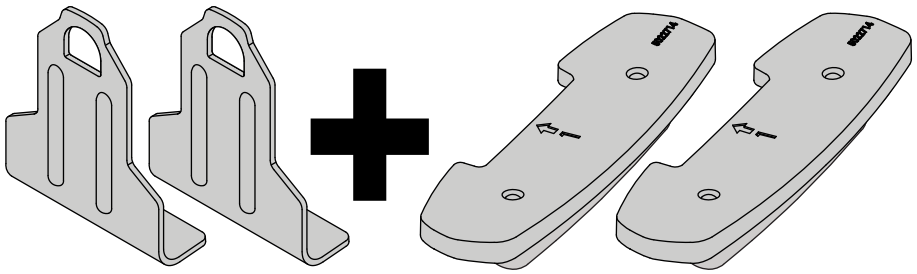

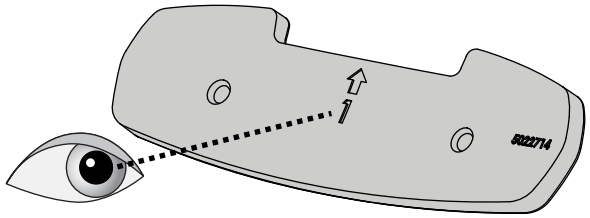

PAD NUMBER:
NUMÉRO DU PATIN:
NÚMERO DE LA ALMOHADILLA:

CLIP NUMBER:
NUMÉRO DU CROCHET:
NÚMERO DE CLIP:

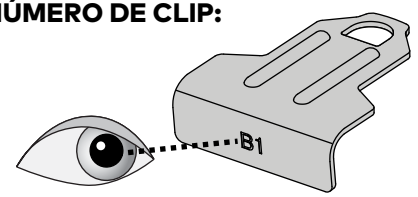

Look at the notes that apply to your vehicle.

Consultez les notes qui concernent votre véhicule.

Lea la información que se refiere a su vehículo.

If your vehicle doesn't appear here go to yakimatech.com

Si votre véhicule n'apparaît pas ici, consulter le site yakimatech.com

Si su vehículo no aparece aquí, visite yakimatech.com

	MAX. LBS.	M1				M2	P1	T1	M3				M4	P2	T2
					inches	inches						inches	inches		
--HONDA--															
Insight 5dr 2010-2014 (BaseLine)	165	BC120	B16	5	37	9	A	2	BC120	B16	5	35 3/4	32	C	2
Insight 5dr 2010-2014 (BaseLine FX)	165	BC120	B16	5	37	9	A	2	BC120	B16	5	35 3/4	32	C	2
--TOYOTA--															
Yaris 5dr 2012-2019 (BaseLine)	165	BC118	B2	4	33	12 3/8	A	1	BC120	B16	5	30 1/2	32	B	2
Yaris 5dr 2012-2019 (BaseLine FX)	165	BC118	B2	4	33	12 3/8	A	1	BC120	B16	5	30 1/2	32	B	2

NOTES
NOTAS

BaseClip Notes

NOTES
NOTAS

US NOTES

READ THE NOTES THAT APPLY TO YOUR VEHICLE:

2 - HullRaiser and HighRoller require one set of MightyMount 39H (PN 8003539) to be compatible with Yakima CoreBar, JetStream bars and FX systems.

5 - HullyRollers, MultiMount, and Mako Saddles require one set of MightyMount 39H (PN 8003539) per pair to be compatible with Yakima CoreBar, JetStream bars and FX systems.

14 - Using Yakima RoundBars with Yakima BaseLine, TimberLine, SkyLine, RidgeLine, or SightLine towers will require the purchase of RoundBar SL Adapter (PN 8003536) sold separately.

54 - Caution! when open, sunroof or panoramic roof may interfere with some accessories.

69 - Visit https://yakweb-assets.s3.amazonaws.com/HatchClearance.pdf for rear hatch clearance information regarding cargo boxes.

81 - All loads extending beyond the length of the roof (except cargo boxes) must be secured to both the front and rear of the vehicle, in addition to the rack.

82 - SideWinder (Tandem Bike Mount) is compatible with Yakima RoundBar only.

103 - Please check your vehicle's front bar to hatch measurement as well as the ShowBoat 66" instructions, found here http://assets.yakima.com/Product/instructions/8004068/1, to ensure compatibility with your target boat weight, roller extension, and vehicle.

109 - Always be sure to tie down your SUP as per instructions. SupPup and SupDawg require using nose tie down strap.

110 - If your vehicle is equipped with a sunroof or panoramic glass roof, prior to operation, ensure adequate clearance exists with roof rack and/or accessories installed.

132 - Any load/mount extending beyond the rear hatch seam may cause interference.

191 - Limited to 2 surf/sail/paddleboards. Boards must be stacked - NEVER carry side-by-side.

604 - RoadShower SM and MD can accommodate crossbar spreads of 24" – 50". The distance from the front or rear clamp to the end of the shower must not be greater than 30". Do not mount RoadShower outboard of tower.

FR NOTES

RESPECTER LES NOTES DE MONTAGE S'APPLIQUANT À VOTRE VÉHICULE.

2 - HullRaiser and HighRoller require one set of MightyMount 39H (PN 8003539) to be compatible with Yakima CoreBar, JetStream bars and FX systems.

5 - HullyRollers, MultiMount, and Mako Saddles require one set of MightyMount 39H (PN 8003539) per pair to be compatible with Yakima CoreBar, JetStream bars and FX systems.

14 - Using Yakima RoundBars with Yakima BaseLine, TimberLine, SkyLine, RidgeLine, or SightLine towers will require the purchase of RoundBar SL Adapter (PN 8003536) sold separately.

54 - Caution! when open, sunroof or panoramic roof may interfere with some accessories.

69 - Visit https://yakweb-assets.s3.amazonaws.com/HatchClearance.pdf for rear hatch clearance information regarding cargo boxes.

81 - All loads extending beyond the length of the roof (except cargo boxes) must be secured to both the front and rear of the vehicle, in addition to the rack.

82 - SideWinder (Tandem Bike Mount) is compatible with Yakima RoundBar only.

103 - Please check your vehicle's front bar to hatch measurement as well as the ShowBoat 66" instructions, found here http://assets.yakima.com/Product/instructions/8004068/1, to ensure compatibility with your target boat weight, roller extension, and vehicle.

109 - Always be sure to tie down your SUP as per instructions. SupPup and SupDawg require using nose tie down strap.

110 - If your vehicle is equipped with a sunroof or panoramic glass roof, prior to operation, ensure adequate clearance exists with roof rack and/or accessories installed.

132 - Any load/mount extending beyond the rear hatch seam may cause interference.

191 - Limited to 2 surf/sail/paddleboards. Boards must be stacked - NEVER carry side-by-side.

604 - RoadShower SM and MD can accommodate crossbar spreads of 24" – 50". The distance from the front or rear clamp to the end of the shower must not be greater than 30". Do not mount RoadShower outboard of tower.

ES NOTAS

LEA Y SIGA LAS OBSERVACIONES QUE CORRESPONDEN A SU VEHÍCULO.

2 - HullRaiser and HighRoller require one set of MightyMount 39H (PN 8003539) to be compatible with Yakima CoreBar, JetStream bars and FX systems.

5 - HullyRollers, MultiMount, and Mako Saddles require one set of MightyMount 39H (PN 8003539) per pair to be compatible with Yakima CoreBar, JetStream bars and FX systems.

14 - Using Yakima RoundBars with Yakima BaseLine, TimberLine, SkyLine, RidgeLine, or SightLine towers will require the purchase of RoundBar SL Adapter (PN 8003536) sold separately.

54 - Caution! when open, sunroof or panoramic roof may interfere with some accessories.

69 - Visit https://yakweb-assets.s3.amazonaws.com/HatchClearance.pdf for rear hatch clearance information regarding cargo boxes.

81 - All loads extending beyond the length of the roof (except cargo boxes) must be secured to both the front and rear of the vehicle, in addition to the rack.

82 - SideWinder (Tandem Bike Mount) is compatible with Yakima RoundBar only.

103 - Please check your vehicle's front bar to hatch measurement as well as the ShowBoat 66" instructions, found here http://assets.yakima.com/Product/instructions/8004068/1, to ensure compatibility with your target boat weight, roller extension, and vehicle.

109 - Always be sure to tie down your SUP as per instructions. SupPup and SupDawg require using nose tie down strap.

110 - If your vehicle is equipped with a sunroof or panoramic glass roof, prior to operation, ensure adequate clearance exists with roof rack and/or accessories installed.

132 - Any load/mount extending beyond the rear hatch seam may cause interference.

191 - Limited to 2 surf/sail/paddleboards. Boards must be stacked - NEVER carry side-by-side.

604 - RoadShower SM and MD can accommodate crossbar spreads of 24" – 50". The distance from the front or rear clamp to the end of the shower must not be greater than 30". Do not mount RoadShower outboard of tower.

BaseClip Notes

NOTES
NOTAS

US NOTES

READ THE NOTES THAT APPLY TO YOUR VEHICLE:

607 - RoadShower LG can accommodate crossbar spreads of 32” - 78”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

611 - OverNOut 180, 270 XL, 270 LG can accommodate crossbar spreads of 26" - 76". The distance from the front or rear clamp to the end of the awning must not be greater than 50". Do not mount greater than 1" outboard of tower.

FR NOTES

RESPECTER LES NOTES DE MONTAGE S’APPLIQUANT À VOTRE VÉHICULE.

607 - RoadShower LG can accommodate crossbar spreads of 32” - 78”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

611 - OverNOut 180, 270 XL, 270 LG can accommodate crossbar spreads of 26" - 76". The distance from the front or rear clamp to the end of the awning must not be greater than 50". Do not mount greater than 1" outboard of tower.

ES NOTAS

LEA Y SIGA LAS OBSERVACIONES QUE CORRESPONDEN A SU VEHÍCULO.

607 - RoadShower LG can accommodate crossbar spreads of 32” - 78”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

611 - OverNOut 180, 270 XL, 270 LG can accommodate crossbar spreads of 26" - 76". The distance from the front or rear clamp to the end of the awning must not be greater than 50". Do not mount greater than 1" outboard of tower.