

YAKIMA


BaseClip 169

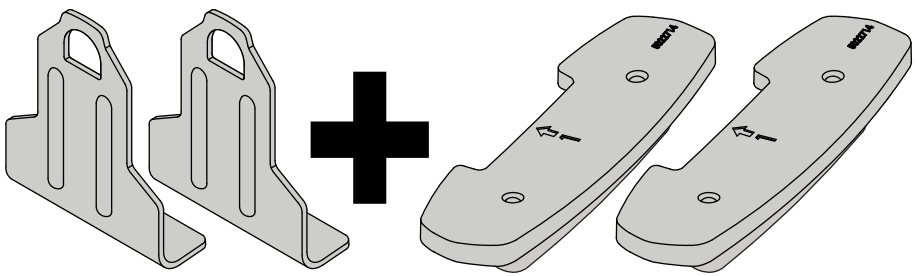

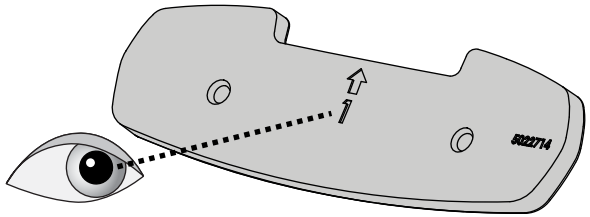

PAD NUMBER:
NUMÉRO DU PATIN:
NÚMERO DE LA ALMOHADILLA:

CLIP NUMBER:
NUMÉRO DU CROCHET:
NÚMERO DE CLIP:

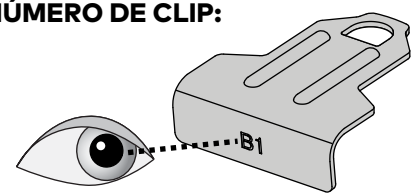

Look at the notes that apply to your vehicle.

Consultez les notes qui concernent votre véhicule.

Lea la información que se refiere a su vehículo.

If your vehicle doesn't appear here go to yakimatech.com

Si votre véhicule n'apparaît pas ici, consulter le site yakimatech.com

Si su vehículo no aparece aquí, visite yakimatech.com

	MAX. LBS.	M1			M2	P1	T1	M3			M4	P2	T2
					inches						inches		
--FORD--													
EcoSport 5dr 2018-2022 (BaseLine)	165	BC129	B58	5	34 5/8	12	A	1	BC169	B66	4	33 7/8	32	B	2
EcoSport 5dr 2018-2022 (BaseLine FX)	165	BC129	B58	5	34 5/8	12	A	1	BC169	B66	4	33 7/8	32	B	2
--HYUNDAI--															
Accent 4dr 2018-2022 (BaseLine)	165	BC169	B66	4	35 1/4	7	A	2	BC169	B66	4	34 1/4	32	C	2
Accent 4dr 2018-2022 (BaseLine FX)	165	BC169	B66	4	35 1/4	7	A	2	BC169	B66	4	34 1/4	32	C	2
Santa Cruz 4dr 2022-2026 (52.00" Bed) (BaseLine)	165	BC175	B85	4	39 3/8	9	A	1	BC169	B66	4	35 1/2	32	B	2
Santa Cruz 4dr 2022-2026 (52.00" Bed) (BaseLine FX)	165	BC175	B85	4	39 3/4	9	A	1	BC169	B66	4	35 1/2	32	B	2
--KIA--															
Sorento 5dr 2011-2015 (BaseLine)	165	BC175	B85	4	40 5/8	9	A	2	BC169	B66	4	37 7/8	32	B	2
Sorento 5dr 2011-2015 (BaseLine FX)	165	BC175	B85	4	40 5/8	9	A	2	BC169	B66	4	37 7/8	32	B	2
Sportage 5dr 2011-2016 (BaseLine)	165	BC169	B66	4	38 7/8	8	A	1	BC169	B66	4	37 1/8	32	B	2
Sportage 5dr 2011-2016 (BaseLine FX)	165	BC169	B66	4	38 7/8	8	A	1	BC169	B66	4	37 1/8	32	B	2
--TOYOTA--															
Prius Prime 5dr 2017-2022 (BaseLine)	165	BC123	B84	4	37 3/4	7	A	1	BC169	B66	4	34 1/4	30	C	2
Prius Prime 5dr 2017-2022 (BaseLine FX)	165	BC123	B84	4	37 3/4	7	A	1	BC169	B66	4	34 1/4	30	C	2
Prius 5dr 2016-2022 (BaseLine)	165	BC123	B84	4	37 3/4	7	A	1	BC169	B66	4	34 1/4	30	C	2
Prius 5dr 2016-2022 (BaseLine FX)	165	BC123	B84	4	37 3/4	7	A	1	BC169	B66	4	34 1/4	30	C	2
RAV4 5dr 2013-2018 (BaseLine)	165	BC180	B85	5	38 1/4	9	A	1	BC169	B66	4	35 1/8	32	C	2
RAV4 5dr 2013-2018 (BaseLine FX)	165	BC180	B85	5	38 1/4	9	A	1	BC169	B66	4	35 1/8	32	C	2

NOTES
NOTAS

YAKIMA BaseClip Notes

NOTES
NOTAS

US NOTES

READ THE NOTES THAT APPLY TO YOUR VEHICLE:

2 - HullRaiser and HighRoller require one set of MightyMount 39H (PN 8003539) to be compatible with Yakima CoreBar, JetStream bars and FX systems.

5 - HullyRollers, MultiMount, and Mako Saddles require one set of MightyMount 39H (PN 8003539) per pair to be compatible with Yakima CoreBar, JetStream bars and FX systems.

14 - Using Yakima RoundBars with Yakima BaseLine, TimberLine, SkyLine, RidgeLine, or SightLine towers will require the purchase of RoundBar SL Adapter (PN 8003536) sold separately.

54 - Caution! when open, sunroof or panoramic roof may interfere with some accessories.

60 - On this application, minimum bar size can be sized down when JetStream or CoreBar are used.

69 - Visit https://yakweb-assets.s3.amazonaws.com/HatchClearance.pdf for rear hatch clearance information regarding cargo boxes.

70 - Caution! Proper tower balance and tower placement is critical for this installation. Be sure that racks remain centered on the vehicle throughout installation. Take note, when tensioning the system, be sure to alternate between both sides evenly.

81 - All loads extending beyond the length of the roof (except cargo boxes) must be secured to both the front and rear of the vehicle, in addition to the rack.

82 - SideWinder (Tandem Bike Mount) is compatible with Yakima RoundBar only.

98 - ShowDown requires crossbars one size larger than the recommended minimum for adequate vehicle side clearance on this application.

103 - Please check your vehicle's front bar to hatch measurement as well as the ShowBoat 66" instructions, found here http://assets.yakima.com/Product/instructions/8004068/1, to ensure compatibility with your target boat weight, roller extension, and vehicle.

109 - Always be sure to tie down your SUP as per instructions. SupPup and SupDawg require using nose tie down strap.

110 - If your vehicle is equipped with a sunroof or panoramic glass roof, prior to operation, ensure adequate clearance exists with roof rack and/or accessories installed.

FR NOTES

RESPECTER LES NOTES DE MONTAGE S'APPLIQUANT À VOTRE VÉHICULE.

2 - HullRaiser and HighRoller require one set of MightyMount 39H (PN 8003539) to be compatible with Yakima CoreBar, JetStream bars and FX systems.

5 - HullyRollers, MultiMount, and Mako Saddles require one set of MightyMount 39H (PN 8003539) per pair to be compatible with Yakima CoreBar, JetStream bars and FX systems.

14 - Using Yakima RoundBars with Yakima BaseLine, TimberLine, SkyLine, RidgeLine, or SightLine towers will require the purchase of RoundBar SL Adapter (PN 8003536) sold separately.

54 - Caution! when open, sunroof or panoramic roof may interfere with some accessories.

60 - On this application, minimum bar size can be sized down when JetStream or CoreBar are used.

69 - Visit https://yakweb-assets.s3.amazonaws.com/HatchClearance.pdf for rear hatch clearance information regarding cargo boxes.

70 - Caution! Proper tower balance and tower placement is critical for this installation. Be sure that racks remain centered on the vehicle throughout installation. Take note, when tensioning the system, be sure to alternate between both sides evenly.

81 - All loads extending beyond the length of the roof (except cargo boxes) must be secured to both the front and rear of the vehicle, in addition to the rack.

82 - SideWinder (Tandem Bike Mount) is compatible with Yakima RoundBar only.

98 - ShowDown requires crossbars one size larger than the recommended minimum for adequate vehicle side clearance on this application.

103 - Please check your vehicle's front bar to hatch measurement as well as the ShowBoat 66" instructions, found here http://assets.yakima.com/Product/instructions/8004068/1, to ensure compatibility with your target boat weight, roller extension, and vehicle.

109 - Always be sure to tie down your SUP as per instructions. SupPup and SupDawg require using nose tie down strap.

110 - If your vehicle is equipped with a sunroof or panoramic glass roof, prior to operation, ensure adequate clearance exists with roof rack and/or accessories installed.

ES NOTAS

LEA Y SIGA LAS OBSERVACIONES QUE CORRESPONDEN A SU VEHÍCULO.

2 - HullRaiser and HighRoller require one set of MightyMount 39H (PN 8003539) to be compatible with Yakima CoreBar, JetStream bars and FX systems.

5 - HullyRollers, MultiMount, and Mako Saddles require one set of MightyMount 39H (PN 8003539) per pair to be compatible with Yakima CoreBar, JetStream bars and FX systems.

14 - Using Yakima RoundBars with Yakima BaseLine, TimberLine, SkyLine, RidgeLine, or SightLine towers will require the purchase of RoundBar SL Adapter (PN 8003536) sold separately.

54 - Caution! when open, sunroof or panoramic roof may interfere with some accessories.

60 - On this application, minimum bar size can be sized down when JetStream or CoreBar are used.

69 - Visit https://yakweb-assets.s3.amazonaws.com/HatchClearance.pdf for rear hatch clearance information regarding cargo boxes.

70 - Caution! Proper tower balance and tower placement is critical for this installation. Be sure that racks remain centered on the vehicle throughout installation. Take note, when tensioning the system, be sure to alternate between both sides evenly.

81 - All loads extending beyond the length of the roof (except cargo boxes) must be secured to both the front and rear of the vehicle, in addition to the rack.

82 - SideWinder (Tandem Bike Mount) is compatible with Yakima RoundBar only.

98 - ShowDown requires crossbars one size larger than the recommended minimum for adequate vehicle side clearance on this application.

103 - Please check your vehicle's front bar to hatch measurement as well as the ShowBoat 66" instructions, found here http://assets.yakima.com/Product/instructions/8004068/1, to ensure compatibility with your target boat weight, roller extension, and vehicle.

109 - Always be sure to tie down your SUP as per instructions. SupPup and SupDawg require using nose tie down strap.

110 - If your vehicle is equipped with a sunroof or panoramic glass roof, prior to operation, ensure adequate clearance exists with roof rack and/or accessories installed.

BaseClip Notes

NOTES
NOTAS

US NOTES

READ THE NOTES THAT APPLY TO YOUR VEHICLE:

117 - For use with with your LockNLoad platform, this application requires 2 pairs of LockNLoad Crossbar Clamps PN 8005039.

132 - Any load/mount extending beyond the rear hatch seam may cause interference.

187 - Boa and ForkChop bike mounts will not work on this application due to crossbar spread limitations.

191 - Limited to 2 surf/sail/paddleboards. Boards must be stacked - NEVER carry side-by-side.

604 - RoadShower SM and MD can accommodate crossbar spreads of 24” – 50”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

607 - RoadShower LG can accommodate crossbar spreads of 32” - 78”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

611 - OverNOut 180, 270 XL, 270 LG can accommodate crossbar spreads of 26" - 76". The distance from the front or rear clamp to the end of the awning must not be greater than 50". Do not mount greater than 1" outboard of tower.

FR NOTES

RESPECTER LES NOTES DE MONTAGE S’APPLIQUANT À VOTRE VÉHICULE.

117 - For use with with your LockNLoad platform, this application requires 2 pairs of LockNLoad Crossbar Clamps PN 8005039.

132 - Any load/mount extending beyond the rear hatch seam may cause interference.

187 - Boa and ForkChop bike mounts will not work on this application due to crossbar spread limitations.

191 - Limited to 2 surf/sail/paddleboards. Boards must be stacked - NEVER carry side-by-side.

604 - RoadShower SM and MD can accommodate crossbar spreads of 24” – 50”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

607 - RoadShower LG can accommodate crossbar spreads of 32” - 78”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

611 - OverNOut 180, 270 XL, 270 LG can accommodate crossbar spreads of 26" - 76". The distance from the front or rear clamp to the end of the awning must not be greater than 50". Do not mount greater than 1" outboard of tower.

ES NOTAS

LEA Y SIGA LAS OBSERVACIONES QUE CORRESPONDEN A SU VEHÍCULO.

117 - For use with with your LockNLoad platform, this application requires 2 pairs of LockNLoad Crossbar Clamps PN 8005039.

132 - Any load/mount extending beyond the rear hatch seam may cause interference.

187 - Boa and ForkChop bike mounts will not work on this application due to crossbar spread limitations.

191 - Limited to 2 surf/sail/paddleboards. Boards must be stacked - NEVER carry side-by-side.

604 - RoadShower SM and MD can accommodate crossbar spreads of 24” – 50”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

607 - RoadShower LG can accommodate crossbar spreads of 32” - 78”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

611 - OverNOut 180, 270 XL, 270 LG can accommodate crossbar spreads of 26" - 76". The distance from the front or rear clamp to the end of the awning must not be greater than 50". Do not mount greater than 1" outboard of tower.