

YAKIMA


BaseClip 171

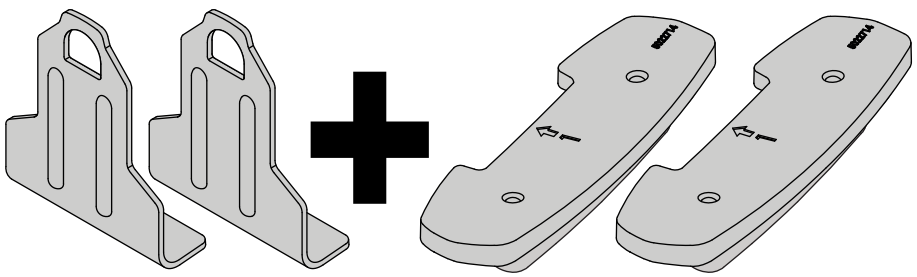

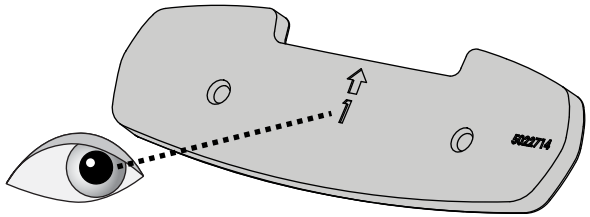

PAD NUMBER:
NUMÉRO DU PATIN:
NÚMERO DE LA ALMOHADILLA:

CLIP NUMBER:
NUMÉRO DU CROCHET:
NÚMERO DE CLIP:

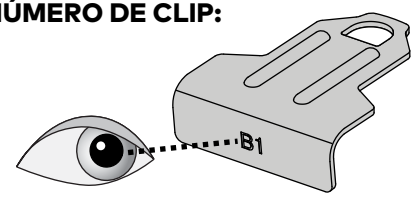

Look at the notes that apply to your vehicle.

Consultez les notes qui concernent votre véhicule.

Lea la información que se refiere a su vehículo.

If your vehicle doesn't appear here go to yakimatech.com

Si votre véhicule n'apparaît pas ici, consulter le site yakimatech.com

Si su vehículo no aparece aquí, visite yakimatech.com

	MAX. LBS.				M1	M2	P1	T1				M3	M4	P2	T2
					inches	inches						inches	inches		
--BUICK--															
Roadmaster Wagon 1991-1996 (BaseLine)	165	BC171	B79	1	42 3/8	1	A	1	BC171	B79	1	40 1/4	18	B	2
Roadmaster Wagon 1991-1996 (BaseLine FX)	165	BC171	B79	1	42 3/8	1	A	1	BC171	B79	1	40 1/4	18	B	2
--FORD--															
Ranger Super Cab 4dr 1998-2011 (75.25" Bed) (BaseLine)	165	BC171	B79	1	39 5/8	4	B	2	BC171	B79	1	39 1/2	32	B	2
Ranger Super Cab 4dr 1998-2011 (87.25" Bed) (BaseLine)	165	BC171	B79	1	39 5/8	4	B	2	BC171	B79	1	39 1/2	32	B	2
Ranger Super Cab 4dr 1998-2011 (75.25" Bed) (BaseLine FX)	165	BC171	B79	1	39 5/8	4	B	2	BC171	B79	1	39 1/2	32	B	2
Ranger Super Cab 4dr 1998-2011 (87.25" Bed) (BaseLine FX)	165	BC171	B79	1	39 5/8	4	B	2	BC171	B79	1	39 1/2	32	B	2
--TOYOTA--															
4-Runner 5dr 1996-2002 (BaseLine)	165	BC171	B79	1	36 1/8	9	A	2	BC171	B79	1	36 1/8	32	B	2
4-Runner 5dr 1996-2002 (BaseLine FX)	165	BC171	B79	1	36 1/8	9	A	2	BC171	B79	1	36 1/8	32	B	2
Avalon 4dr 1995-1999 (BaseLine)	165	BC171	B79	1	37 7/8	4	A	2	BC171	B79	1	36 1/2	32	C	2
Avalon 4dr 1995-1999 (BaseLine FX)	165	BC171	B79	1	37 7/8	4	A	2	BC171	B79	1	36 1/2	32	C	2
Tacoma Double Cab 4dr 2001-2004 (60.25" Bed) (BaseLine)	165	BC171	B79	1	36 1/8	8	B	2	BC171	B79	1	36 1/8	32	B	2
Tacoma Double Cab 4dr 2001-2004 (73.50" Bed) (BaseLine)	165	BC171	B79	1	36 1/8	8	B	2	BC171	B79	1	36 1/8	32	B	2
Tacoma Double Cab 4dr 2001-2004 (60.25" Bed) (BaseLine FX)	165	BC171	B79	1	36 1/8	8	B	2	BC171	B79	1	36 1/8	32	B	2
Tacoma Double Cab 4dr 2001-2004 (73.50" Bed) (BaseLine FX)	165	BC171	B79	1	36 1/8	8	B	2	BC171	B79	1	36 1/8	32	B	2

NOTES
NOTAS

YAKIMA BaseClip Notes

NOTES
NOTAS

US NOTES

READ THE NOTES THAT APPLY TO YOUR VEHICLE:

2 - HullRaiser and HighRoller require one set of MightyMount 39H (PN 8003539) to be compatible with Yakima CoreBar, JetStream bars and FX systems.

5 - HullyRollers, MultiMount, and Mako Saddles require one set of MightyMount 39H (PN 8003539) per pair to be compatible with Yakima CoreBar, JetStream bars and FX systems.

14 - Using Yakima RoundBars with Yakima BaseLine, TimberLine, SkyLine, RidgeLine, or SightLine towers will require the purchase of RoundBar SL Adapter (PN 8003536) sold separately.

54 - Caution! when open, sunroof or panoramic roof may interfere with some accessories.

61 - The roof, rubber/chrome door seals and/or trim may deform or be damaged under prolonged contact with any roof rack towers and/or clips. Do not over-tighten or overload the rack. Remove rack when not in use.

69 - Visit https://yakweb-assets.s3.amazonaws.com/HatchClearance.pdf for rear hatch clearance information regarding cargo boxes.

70 - Caution! Proper tower balance and tower placement is critical for this installation. Be sure that racks remain centered on the vehicle throughout installation. Take note, when tensioning the system, be sure to alternate between both sides evenly.

77 - Due to manufacture variance, There may be slight contact between door and back side of clip when door is closed. To prevent scratching, Place vinyl pad on back side of clip where contact is possible. If not included, contact Customer Service at (888) 925-4621 Monday through Friday, 7:00 AM to 5:00 PM, PST. Please allow 3-5 business days for delivery.

78 - Press firmly against the lower portion of the clip while tightening the rack. This will properly locate the clip against the door frame during installation.

81 - All loads extending beyond the length of the roof (except cargo boxes) must be secured to both the front and rear of the vehicle, in addition to the rack.

82 - SideWinder (Tandem Bike Mount) is compatible with Yakima RoundBar only.

84 - SideWinder (Tandem Bike Mount) will not work due to crossbar spread limitations.

103 - Please check your vehicle's front bar to hatch measurement as well as the ShowBoat 66" instructions, found here http://assets.yakima.com/Product/instructions/8004068/1, to ensure compatibility with your target boat weight, roller extension, and vehicle.

FR NOTES

RESPECTER LES NOTES DE MONTAGE S'APPLIQUANT À VOTRE VÉHICULE.

2 - HullRaiser and HighRoller require one set of MightyMount 39H (PN 8003539) to be compatible with Yakima CoreBar, JetStream bars and FX systems.

5 - HullyRollers, MultiMount, and Mako Saddles require one set of MightyMount 39H (PN 8003539) per pair to be compatible with Yakima CoreBar, JetStream bars and FX systems.

14 - Using Yakima RoundBars with Yakima BaseLine, TimberLine, SkyLine, RidgeLine, or SightLine towers will require the purchase of RoundBar SL Adapter (PN 8003536) sold separately.

54 - Caution! when open, sunroof or panoramic roof may interfere with some accessories.

61 - The roof, rubber/chrome door seals and/or trim may deform or be damaged under prolonged contact with any roof rack towers and/or clips. Do not over-tighten or overload the rack. Remove rack when not in use.

69 - Visit https://yakweb-assets.s3.amazonaws.com/HatchClearance.pdf for rear hatch clearance information regarding cargo boxes.

70 - Caution! Proper tower balance and tower placement is critical for this installation. Be sure that racks remain centered on the vehicle throughout installation. Take note, when tensioning the system, be sure to alternate between both sides evenly.

77 - Due to manufacture variance, There may be slight contact between door and back side of clip when door is closed. To prevent scratching, Place vinyl pad on back side of clip where contact is possible. If not included, contact Customer Service at (888) 925-4621 Monday through Friday, 7:00 AM to 5:00 PM, PST. Please allow 3-5 business days for delivery.

78 - Press firmly against the lower portion of the clip while tightening the rack. This will properly locate the clip against the door frame during installation.

81 - All loads extending beyond the length of the roof (except cargo boxes) must be secured to both the front and rear of the vehicle, in addition to the rack.

82 - SideWinder (Tandem Bike Mount) is compatible with Yakima RoundBar only.

84 - SideWinder (Tandem Bike Mount) will not work due to crossbar spread limitations.

103 - Please check your vehicle's front bar to hatch measurement as well as the ShowBoat 66" instructions, found here http://assets.yakima.com/Product/instructions/8004068/1, to ensure compatibility with your target boat weight, roller extension, and vehicle.

ES NOTAS

LEA Y SIGA LAS OBSERVACIONES QUE CORRESPONDEN A SU VEHÍCULO.

2 - HullRaiser and HighRoller require one set of MightyMount 39H (PN 8003539) to be compatible with Yakima CoreBar, JetStream bars and FX systems.

5 - HullyRollers, MultiMount, and Mako Saddles require one set of MightyMount 39H (PN 8003539) per pair to be compatible with Yakima CoreBar, JetStream bars and FX systems.

14 - Using Yakima RoundBars with Yakima BaseLine, TimberLine, SkyLine, RidgeLine, or SightLine towers will require the purchase of RoundBar SL Adapter (PN 8003536) sold separately.

54 - Caution! when open, sunroof or panoramic roof may interfere with some accessories.

61 - The roof, rubber/chrome door seals and/or trim may deform or be damaged under prolonged contact with any roof rack towers and/or clips. Do not over-tighten or overload the rack. Remove rack when not in use.

69 - Visit https://yakweb-assets.s3.amazonaws.com/HatchClearance.pdf for rear hatch clearance information regarding cargo boxes.

70 - Caution! Proper tower balance and tower placement is critical for this installation. Be sure that racks remain centered on the vehicle throughout installation. Take note, when tensioning the system, be sure to alternate between both sides evenly.

77 - Due to manufacture variance, There may be slight contact between door and back side of clip when door is closed. To prevent scratching, Place vinyl pad on back side of clip where contact is possible. If not included, contact Customer Service at (888) 925-4621 Monday through Friday, 7:00 AM to 5:00 PM, PST. Please allow 3-5 business days for delivery.

78 - Press firmly against the lower portion of the clip while tightening the rack. This will properly locate the clip against the door frame during installation.

81 - All loads extending beyond the length of the roof (except cargo boxes) must be secured to both the front and rear of the vehicle, in addition to the rack.

82 - SideWinder (Tandem Bike Mount) is compatible with Yakima RoundBar only.

84 - SideWinder (Tandem Bike Mount) will not work due to crossbar spread limitations.

103 - Please check your vehicle's front bar to hatch measurement as well as the ShowBoat 66" instructions, found here http://assets.yakima.com/Product/instructions/8004068/1, to ensure compatibility with your target boat weight, roller extension, and vehicle.

BaseClip Notes

NOTES
NOTAS

US NOTES

READ THE NOTES THAT APPLY TO YOUR VEHICLE:

105 - Long loads are not recommended for this application due to vehicle design and rack system interface.

109 - Always be sure to tie down your SUP as per instructions. SupPup and SupDawg require using nose tie down strap.

110 - If your vehicle is equipped with a sunroof or panoramic glass roof, prior to operation, ensure adequate clearance exists with roof rack and/or accessories installed.

117 - For use with with your LockNLoad platform, this application requires 2 pairs of LockNLoad Crossbar Clamps PN 8005039.

132 - Any load/mount extending beyond the rear hatch seam may cause interference.

187 - Boa and ForkChop bike mounts will not work on this application due to crossbar spread limitations.

191 - Limited to 2 surf/sail/paddleboards. Boards must be stacked - NEVER carry side-by-side.

604 - RoadShower SM and MD can accommodate crossbar spreads of 24” – 50”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

607 - RoadShower LG can accommodate crossbar spreads of 32” - 78”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

611 - OverNOut 180, 270 XL, 270 LG can accommodate crossbar spreads of 26" - 76". The distance from the front or rear clamp to the end of the awning must not be greater than 50". Do not mount greater than 1" outboard of tower.

FR NOTES

RESPECTER LES NOTES DE MONTAGE S’APPLIQUANT À VOTRE VÉHICULE.

105 - Long loads are not recommended for this application due to vehicle design and rack system interface.

109 - Always be sure to tie down your SUP as per instructions. SupPup and SupDawg require using nose tie down strap.

110 - If your vehicle is equipped with a sunroof or panoramic glass roof, prior to operation, ensure adequate clearance exists with roof rack and/or accessories installed.

117 - For use with with your LockNLoad platform, this application requires 2 pairs of LockNLoad Crossbar Clamps PN 8005039.

132 - Any load/mount extending beyond the rear hatch seam may cause interference.

187 - Boa and ForkChop bike mounts will not work on this application due to crossbar spread limitations.

191 - Limited to 2 surf/sail/paddleboards. Boards must be stacked - NEVER carry side-by-side.

604 - RoadShower SM and MD can accommodate crossbar spreads of 24” – 50”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

607 - RoadShower LG can accommodate crossbar spreads of 32” - 78”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

611 - OverNOut 180, 270 XL, 270 LG can accommodate crossbar spreads of 26" - 76". The distance from the front or rear clamp to the end of the awning must not be greater than 50". Do not mount greater than 1" outboard of tower.

ES NOTAS

LEA Y SIGA LAS OBSERVACIONES QUE CORRESPONDEN A SU VEHÍCULO.

105 - Long loads are not recommended for this application due to vehicle design and rack system interface.

109 - Always be sure to tie down your SUP as per instructions. SupPup and SupDawg require using nose tie down strap.

110 - If your vehicle is equipped with a sunroof or panoramic glass roof, prior to operation, ensure adequate clearance exists with roof rack and/or accessories installed.

117 - For use with with your LockNLoad platform, this application requires 2 pairs of LockNLoad Crossbar Clamps PN 8005039.

132 - Any load/mount extending beyond the rear hatch seam may cause interference.

187 - Boa and ForkChop bike mounts will not work on this application due to crossbar spread limitations.

191 - Limited to 2 surf/sail/paddleboards. Boards must be stacked - NEVER carry side-by-side.

604 - RoadShower SM and MD can accommodate crossbar spreads of 24” – 50”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

607 - RoadShower LG can accommodate crossbar spreads of 32” - 78”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

611 - OverNOut 180, 270 XL, 270 LG can accommodate crossbar spreads of 26" - 76". The distance from the front or rear clamp to the end of the awning must not be greater than 50". Do not mount greater than 1" outboard of tower.